

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A



HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

 **MENNEKES**
MY POWER CONNECTION

CONTENTS

PRODUCT INFORMATION

WALL MOUNTED AND PANEL MOUNTED RECEPTACLES

PLUGS AND CONNECTORS

APPLICATIONS

WE ARE MENNEKES

Contents



Product information



Wall mounted and panel mounted receptacles



Plugs and connectors



Applications



We are MENNEKES

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

 **MENNEKES**
MY POWER CONNECTION

CONTENTS

PRODUCT INFORMATION

WALL MOUNTED AND PANEL MOUNTED RECEPTACLES

PLUGS AND CONNECTORS

APPLICATIONS

WE ARE MENNEKES

160 A - 600 A

High-current plugs and sockets suitable for harsh ambient conditions in industrial applications, mining, construction sites, and energy generation systems.



The heavy-duty series plugs and sockets extend the currently standardized plugs and sockets according to EN 60309-2 by rated currents from 160 A to 600 A as well as rated voltages of up to 1000 V. They are built in accordance with the following standards: IEC 309-1, EN 60309-1, DIN VDE 0623, Part 1.

Finger-safe thanks to contact covers.

The contact jacks on the receptacles and connectors are equipped with contact covers, which reliably prevent coming into contact with live contact jacks. Finger-safe as defined by IEC 309-1/EN 60309-1.

160 A - 600 A

High-current plugs and sockets suitable for harsh ambient conditions in industrial applications, mining, construction sites, and energy generation systems.

Mechanical interlock.

For non-stationary electrical consumers with a rated current > 125 A, the heavy-duty series with 160 A, 200 A, 250 A, 400 A and 600 A is included as part of the range. This series is suitable for rated voltages from 230 V to 1000 V.

A seawater resistant version is also available for all devices.

The heavy-duty series is designated for use in extremely harsh conditions. For example:

- at construction sites
- on drilling rigs and conveyor systems
- for tunnel construction
- in quarry pits
- in gravel quarries
- in opencast mining
- for crane installations at ports and container ports
- at airports
- as a flexible power supply at major events
- to supply market places
- also available in seawater resistant version



160 A - 600 A

High-current plugs and sockets suitable for harsh ambient conditions in industrial applications, mining, construction sites, and energy generation systems.

Surface protection for contacts.

Surface protection against aggressive atmospheres and harsh ambient conditions. Contacts up to 200 A are nickel-plated as standard. Starting with 250 A, the contacts are silver-plated. In order to reduce downtimes, 250 A devices or higher are designed for quick replacement of worn parts. Without opening the device or removing the cable, the contact pins and jacks can be replaced by unscrewing the front section from the terminal.



Outer strain relief for simple cable insertion.

Plugs, connectors, inlets and wall mounted receptacles are supplied with trumpet-shaped cable glands suitable for cable diameters from 34 to 66 mm (160 A to 400 A), or 55 to 85 mm (600 A). The outer strain relief facilitates cable insertion and ensures that the cable remains securely seated in the wiring device.



Pilot contact.

All plugs and sockets come equipped with two pilot contacts as standard. The contacts are lagging when making contact and leading while breaking contact. If necessary, plugs and sockets can be interlocked electrically.






HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Wall mounted receptacle Plastic enclosure, aluminum front part, screw terminals, external fixing, cable entry at top, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	160	4	75080	75081	
	160	5	75310		
 <p>Wall mounted receptacle Plastic enclosure, aluminum front part, screw terminals, external fixing, cable entry at top, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	200	4	75221	75222	
	200	5	75226		
	250	4	75327	75328	
	250	5	75329		
 <p>Wall mounted receptacle Aluminum enclosure, screw terminals, external fixing, cable entry at top, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	250	4	75021	75022	
	250	5	75111		
	400	4	75026		
	400	5	75116		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION

		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Wall mounted receptacle Aluminum enclosure, screw terminals, external fixing, cable entry at top, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	600	4	75339		
	600	5	75142		
 <p>Wall mounted receptacle DUO Screw terminals, switched, mechanical interlock, cable entry bushing for cables of 20 mm up to 70 mm at top and blind flange at bottom, enclosure made of sheet steel, painted in RAL 1021</p> <p>IP55 Std. Pack. Qty: 1</p>	160	4	75143		
	160	5	75144		
 <p>Wall mounted receptacle DUO Screw terminals, switched, mechanical interlock, cable entry bushing for cables of 20 mm up to 70 mm at top and blind flange at bottom, enclosure made of sheet steel, painted in RAL 1021</p> <p>IP55 Std. Pack. Qty: 1</p>	200	4	75231		
	200	5	75236		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION



		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
	Wall mounted receptacle DUO Screw terminals, switched, mechanical interlock, cable entry bushing for cables of 20 mm up to 70 mm at top and blind flange at bottom, enclosure made of sheet steel, painted in RAL 1021 IP67 Std. Pack. Qty: 1	250	4	75145	
		250	5	75146	
	Wall mounted receptacle DUO Screw terminals, switched, mechanical interlock, cable entry bushing for cables of 20 mm up to 70 mm at top and blind flange at bottom, enclosure made of sheet steel, painted in RAL 1021 IP55 Std. Pack. Qty: 1	250	4	75031	
		250	5	75121	
		400	4	75036	
		400	5	75126	
	Wall mounted receptacle DUO Screw terminals, switched, mechanical interlock, cable entry bushing for cables of 20 mm up to 70 mm at top and blind flange at bottom, enclosure made of sheet steel, painted in RAL 1021 IP55 Std. Pack. Qty: 1	600	4	75147	
		600	5	75148	

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Wall mounted receptacle electrical interlock Screw terminals, electrical interlock with contactor, cable entry bushing for cables of 20 mm up to 70 mm at top and blind flange at bottom, enclosure made of sheet steel, painted in RAL 1021</p> <p>IP55 Std. Pack. Qty: 1</p>	200	5	75276		
 <p>Wall mounted receptacle electrical interlock Screw terminals, electrical interlock with contactor, cable entry bushing for cables of 20 mm up to 70 mm at top and blind flange at bottom, enclosure made of sheet steel, painted in RAL 1021</p> <p>IP55 Std. Pack. Qty: 1</p>	250	5	75441		
		400	5	75448	

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Panel mounted receptacle Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>	160	4	75067	75069	
	160	5	75070		
 <p>Panel mounted receptacle Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>	200	4	75241	75242	
	200	5	75246		
	250	4	75320	75322	
	250	5	75323		
 <p>Panel mounted receptacle Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>	250	4	75041	75042	
	250	5	75131		
	400	4	75046		
	400	5	75136		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Panel mounted receptacle Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>	600	4	75335		
	600	5	75337		
 <p>Panel mounted receptacle Aluminum enclosure, screw terminals, 15° inclination</p> <p>IP67 Std. Pack. Qty: 1</p>	200	4	75053		
	200	5	75058		
 <p>Panel mounted receptacle Screw terminals, 15° inclination</p> <p>IP67 Std. Pack. Qty: 1</p>	250	4	75063		
	250	5	75068		
	400	4	75073	75074	
	400	5	75078		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Plug Plastic enclosure, aluminum front part, screw terminals, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	160	4	75055	75056	
	160	5	75057		
 <p>Plug Plastic enclosure, aluminum front part, screw terminals, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	200	4	75201	75202	
	200	5	75206		
	250	4	75312	75313	
	250	5	75075		
 <p>Plug Aluminum enclosure, screw terminals, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	250	4	75001	75002	
	250	5	75091		
	400	4	75006	75007	
	400	5	75096		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Plug Aluminum enclosure, screw terminals, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	600	4	75330		
	600	5	75332		
 <p>Wall mounted inlet Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>	160	5	75077		
 <p>Wall mounted inlet Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>	200	5	75256		
	250	5	75325		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Wall mounted inlet Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>		250	5	75173	
		400	4	75389	
		400	5	75398	
 <p>Wall mounted inlet Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>		600	4	75338	
 <p>Panel mounted inlet Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>		160	5	75066	

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Panel mounted inlet Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>	200	4	75261		
	200	5	75266		
 <p>Panel mounted inlet Aluminum enclosure, screw terminals</p> <p>IP67 Std. Pack. Qty: 1</p>	250	4	75284		
	250	5	75287		
	400	4	75291		
 <p>Panel mounted inlet, angled Screw terminals, 15° inclination</p> <p>IP67 Std. Pack. Qty: 1</p>	200	5	75316		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION




		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Panel mounted inlet, angled Aluminum enclosure, screw terminals, 15° inclination</p> <p>IP67 Std. Pack. Qty: 1</p>	250	5	75324		
 <p>Panel mounted inlet, angled Aluminum enclosure, screw terminals, 15° inclination</p> <p>IP67 Std. Pack. Qty: 1</p>	250	4	75321		
	250	5	75326		
	400	4	75331		
	400	5	75336		
 <p>Connector Plastic enclosure, aluminum front part, screw terminals, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	160	4	75059	75060	
	160	5	75065		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Designed and made based on DIN EN IEC 60309-1 (VDE 0623-1). Enclosure made from aluminum and/or plastic or steel plate. Voltages and frequencies not listed as well as information on larger cable glands or enclosures made from plastic or stainless steel are available on request. A seawater resistant version is also available for all devices.

PRODUCT INFORMATION

		A	P	400 V 50 a. 60 Hz 4 p 5 p 6 h 6 h	500 V 50 a. 60 Hz 4 p 5 p 7 h 7 h
 <p>Connector Plastic enclosure, aluminum front part, screw terminals, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	200	4	75211	75212	
	200	5	75216		
	250	4	75317		
	250	5	75076		
 <p>Connector Aluminum enclosure, screw terminals, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	250	4	75011	75012	
	250	5	75101		
	400	4	75016	75017	
	400	5	75106		
 <p>Connector Aluminum enclosure, screw terminals, with cable gland</p> <p>IP67 Std. Pack. Qty: 1</p>	600	4	75333		
	600	5	75334		

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

CONTENTS

PRODUCT INFORMATION

WALL MOUNTED AND PANEL MOUNTED RECEPTACLES

PLUGS AND CONNECTORS

APPLICATIONS

WE ARE MENNEKES


Applications



Control cabinet design and construction



Assemblies for construction sites (ACS)

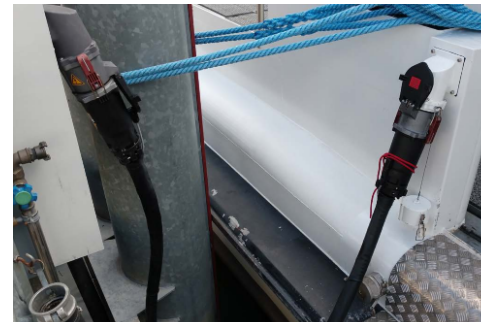

Port and shore connections



Electrical construction machines



Airports



Tunnel construction



Agriculture

HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

Contacts at MENNEKES



Do you have questions about our products and solutions?
You can find our contact persons on our website:



HIGH-CURRENT PLUGS AND SOCKETS

160 A - 600 A

 **MENNEKES**
MY POWER CONNECTION

CONTENTS

PRODUCT INFORMATION

WALL MOUNTED AND PANEL MOUNTED RECEPTACLES

PLUGS AND CONNECTORS

APPLICATIONS

WE ARE MENNEKES

MY POWER CONNECTION

We are MENNEKES.

The MENNEKES Group is the world's leading provider of industrial plugs and sockets and e-mobility charging solutions. Our "type 2" charging plug has been the official standard connector for electric vehicles throughout the European Union since 2014. Since our family-owned company was founded in Germany's Sauerland region back in 1935, it has spread around the world and is currently represented in 90 countries by subsidiaries with a total workforce of around 1,600 employees.



We produce plugs and connectors, receptacles and receptacle combinations in a vast range of types and models.

Our robust, long-lasting solutions are deployed wherever electric power needs to flow reliably and consistently: in industrial applications, railway and transport companies, mining and shipbuilding industry, in container ports and at airports, on trade exhibitions, in stadiums and data centers. In the field of e-mobility, MENNEKES supplies appropriate solutions and equipment for future mobility. Our range includes charging plugs and cables, intelligent charging columns and wallboxes, billing services and a network of trained installers – for private, industrial, commercial and public applications. For the automotive industry and its suppliers, we also make charging inlets and cables for electric cars.